

HEAT TREATMENT / DEBINDING & SINTERING FOR

**ADDITIVE MANUFACTURING OF METALS
METAL INJECTION MOULDING**



ENABLING PROGRESS

- HEAT TREATMENT**
- ELEMENTAL ANALYSIS**
- MATERIALOGRAPHY & HARDNESS TESTING**
- MILLING & SIEVING**
- PARTICLE CHARACTERIZATION**

Under the roof of VERDER SCIENTIFIC we support thousands of customers worldwide in realizing the ambition we share. As their technology partner behind the scenes, we deliver the solutions they need to make progress and to improve the everyday lives of countless people. Together, we make the world a healthier, safer and more sustainable place.

LEADING HEAT TECHNOLOGY

CARBOLITE – OVER 85 YEARS OF INNOVATION

The Carbolite brand is synonymous with high quality, leading heat technology in the design and manufacture of laboratory and industrial ovens & furnaces ranging from 30°C to 3000°C which are sold globally to over 100 countries.

In 2016 Carbolite (UK) and Gero (Germany) merged to become one company under the name of Carbolite. With the combined product lines, the company has strengthened its market position locally and globally.

Carbolite has two manufacturing and sales sites. One is based in Derbyshire in the United Kingdom, where Carbolite manufactures laboratory and industrial ovens and furnaces up to 1800°C; the second facility is located in Neuhausen, southern Germany, where high temperature furnaces up to 3000°C with a large variety of solutions for vacuum and other modified atmospheres have been manufactured since 1982.

In addition to the extensive range of standard products as shown in this catalogue, Carbolite is an expert in the development of customized equipment for complex heat treatment processes. Solving customers' individual application requirements has given Carbolite an important place in aerospace, engineering, materials science, heat treatment, medical, bioscience and contract testing laboratories globally. Not only can Carbolite supply products with Standards-compliant furnace and oven designs (e.g., Nadcap heat treatment processes (AMS2750F)), but also fully traceable certification for control, measurement, recording and data acquisition devices, issued by an independent UKAS accredited laboratory.

All products, and more, featured in this catalogue are available through your local Carbolite office, Verder Scientific office or an extensive network of 3rd party dealers and sales organisations.



Carbolite,
Neuhausen (Germany)



Carbolite,
Hope (United Kingdom)

| 1938

Carbolite founded in
Sheffield

| 1966

Production moves
from Sheffield to
Bamford Mill

| 1982

Gero founded in
Germany

| 1993

Carbolite relocates
to a new site in Hope
as Gero relocates to
Neuhausen

| 2012/13

Carbolite and
Gero acquired by
Verder Group

| 2016

Companies merged
as Carbolite Gero

| 2025

Carbolite Gero
rebranded to Carbolite

Carbolite launches
its own temperature
controller AriesPlus

ELECTRON BEAM MELTING

DIRECT METAL DEPOSITION

SELECTIVE LASER MELTING

SELECTIVE LASER SINTERING

RAPID PROTOTYPING

LASER BEAM MELTING

MICROTRAC

Particle size and shape characterization by Dynamic Image Analysis.

QATM

Machines for cutting, mounting, polishing and etching for surface preparation as prerequisite for reliable microstructural analysis.

CARBOLITE

Furnaces and ovens for heat treatment, debinding and sintering under air, inert gas, reactive gas or vacuum.

FREEFORM FABRICATION

POWDER BED FUSION

Retsch

Sieve Shakers for separation of metal powders remaining after the 3D printing process for re-use.

VERDER

ELTRA

Elemental analyzers to determine e.g. the oxygen content in metal powders used for AM processes.

BINDER JETTING

LASER CLADDING

SOLID FREEFORM FABRICATION

QATM

Hardness testing of metal components produced by additive manufacturing.

ELTRA

DIRECT ENERGY DEPOSITION

DIRECT METAL LASER SINTERING

LASER METAL DEPOSITION


RAPID MANUFACTURING

VERDER SCIENTIFIC

SOLUTIONS FOR ADDITIVE MANUFACTURING & METAL INJECTION MOULDING

All manufacturing companies under the roof of Verder Scientific provide solutions for Additive Manufacturing and MIM technologies. Everything starts with the powder and ends with the finished product, and with many production steps along the way. The equipment of CARBOLITE, ELTRA, QATM, MICROTRAC MRB and RETSCH helps you to implement a variety of production processes and ensure quality control.

Particle size and shape analysis, elemental analysis, heat treatment, microstructural analysis and hardness testing: the Verder Scientific companies offer innovative, efficient solutions for your Additive Manufacturing or Metal Injection Moulding process – combined with expert advice and service support worldwide.

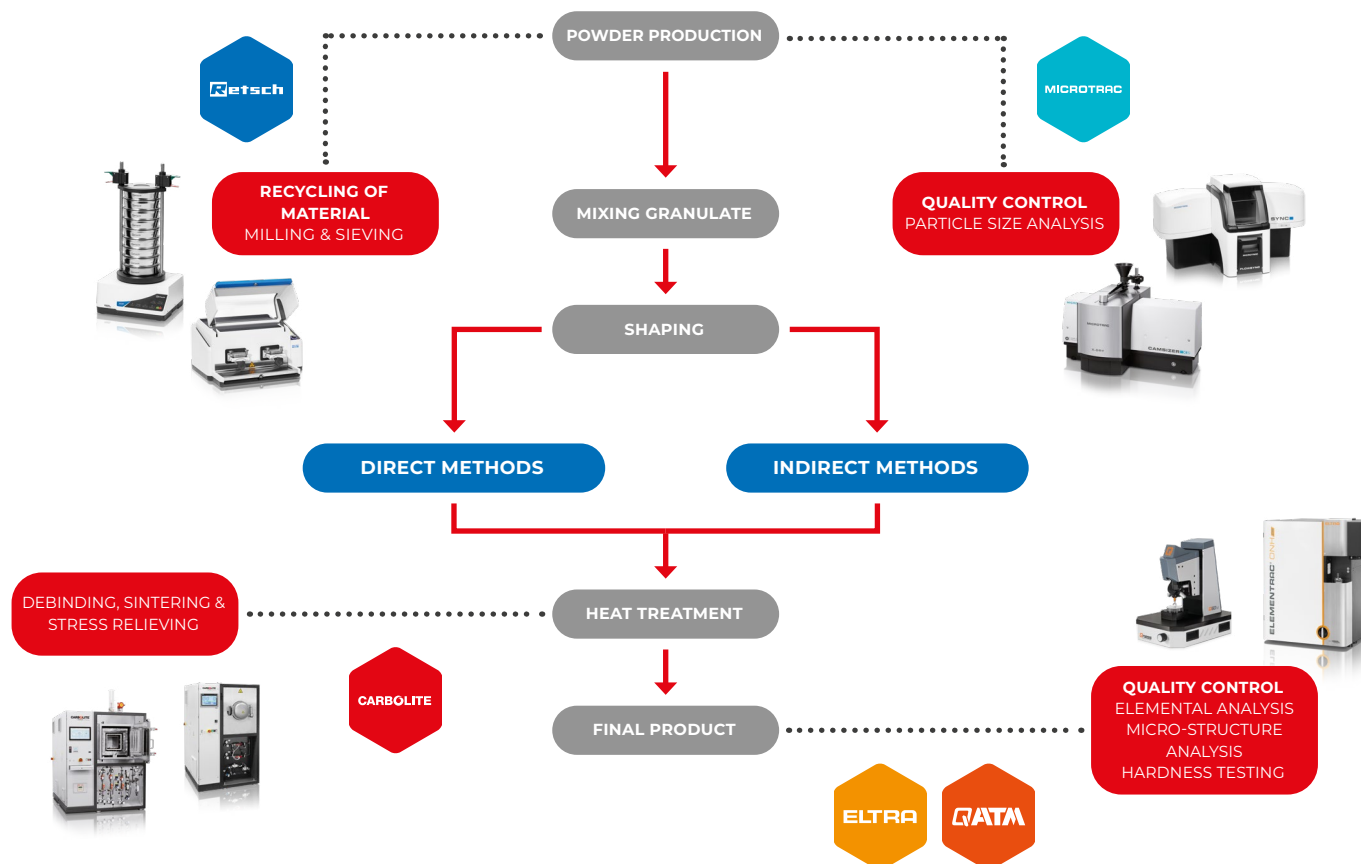

CARBOLITE
HEAT TREATMENT



ELTRA
ELEMENTAL ANALYSIS



QATM
MATERIALOGRAPHY & HARDNESS TESTING



RETSCH
MILLING & SIEVING



MICROTRAC MRB
PARTICLE CHARACTERIZATION




DOWNLOAD
our brochure now for
more information!

OVERVIEW: ADDITIVE MANUFACTURING PROCESSES

DIRECT AND INDIRECT PROCESSES

Additive methods can be divided into two categories. Direct methods, such as SLM and EBM, are very well known and have reached a broad market acceptance in the industrial environment.

However, indirect methods have become more important in recent years. With these methods a green part is produced in the first process step, which is debinded and sintered in the second step.

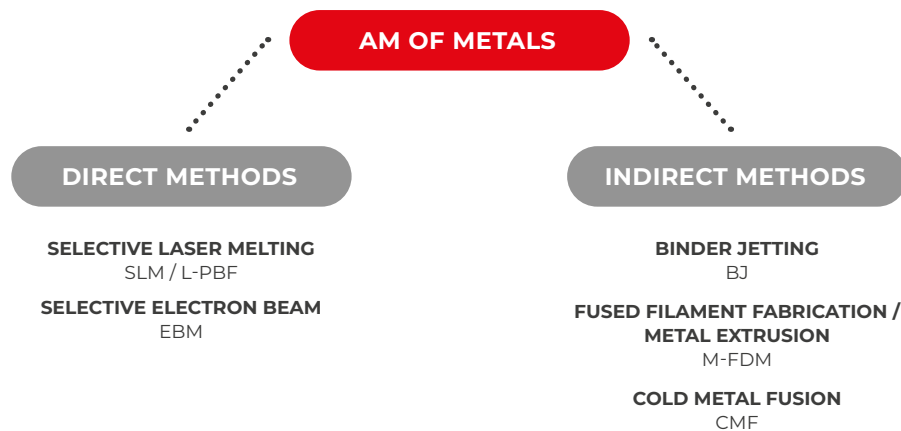


* Examples of direct and indirect Additive Manufacturing methods

	DIRECT AM METHODS	INDIRECT AM METHODS
METHOD	L-PBF, EBM One-step process Direct production of components through welding processes	BJ, CMF, M-FDM Two-step process In the first step: Production of green parts In the second step: Debinding and sintering of the green parts
ADVANTAGES	<ul style="list-style-type: none"> Material can be applied to existing structures High degree of development High reproducibility 	<ul style="list-style-type: none"> Wide variety of materials possible, materials can be processed that are also not weldable Component properties comparable to MIM components Highest ratio of the volume of all printed parts to printer volume (even stacking is possible)
DISADVANTAGES	<ul style="list-style-type: none"> Rough surfaces High thermal stresses are introduced into the components as a result of the process Support structures are required for complex geometries Surface porosity Reworking of components required, removal of support structures always necessary High heat input Powder handling 	<ul style="list-style-type: none"> Sintering distortion of the components possible More complex process chain compared to direct AM methods

HEAT TREATMENT
FOR EVERYONE

QUALITY
CUSTOMER FOCUS
EXPERIENCE

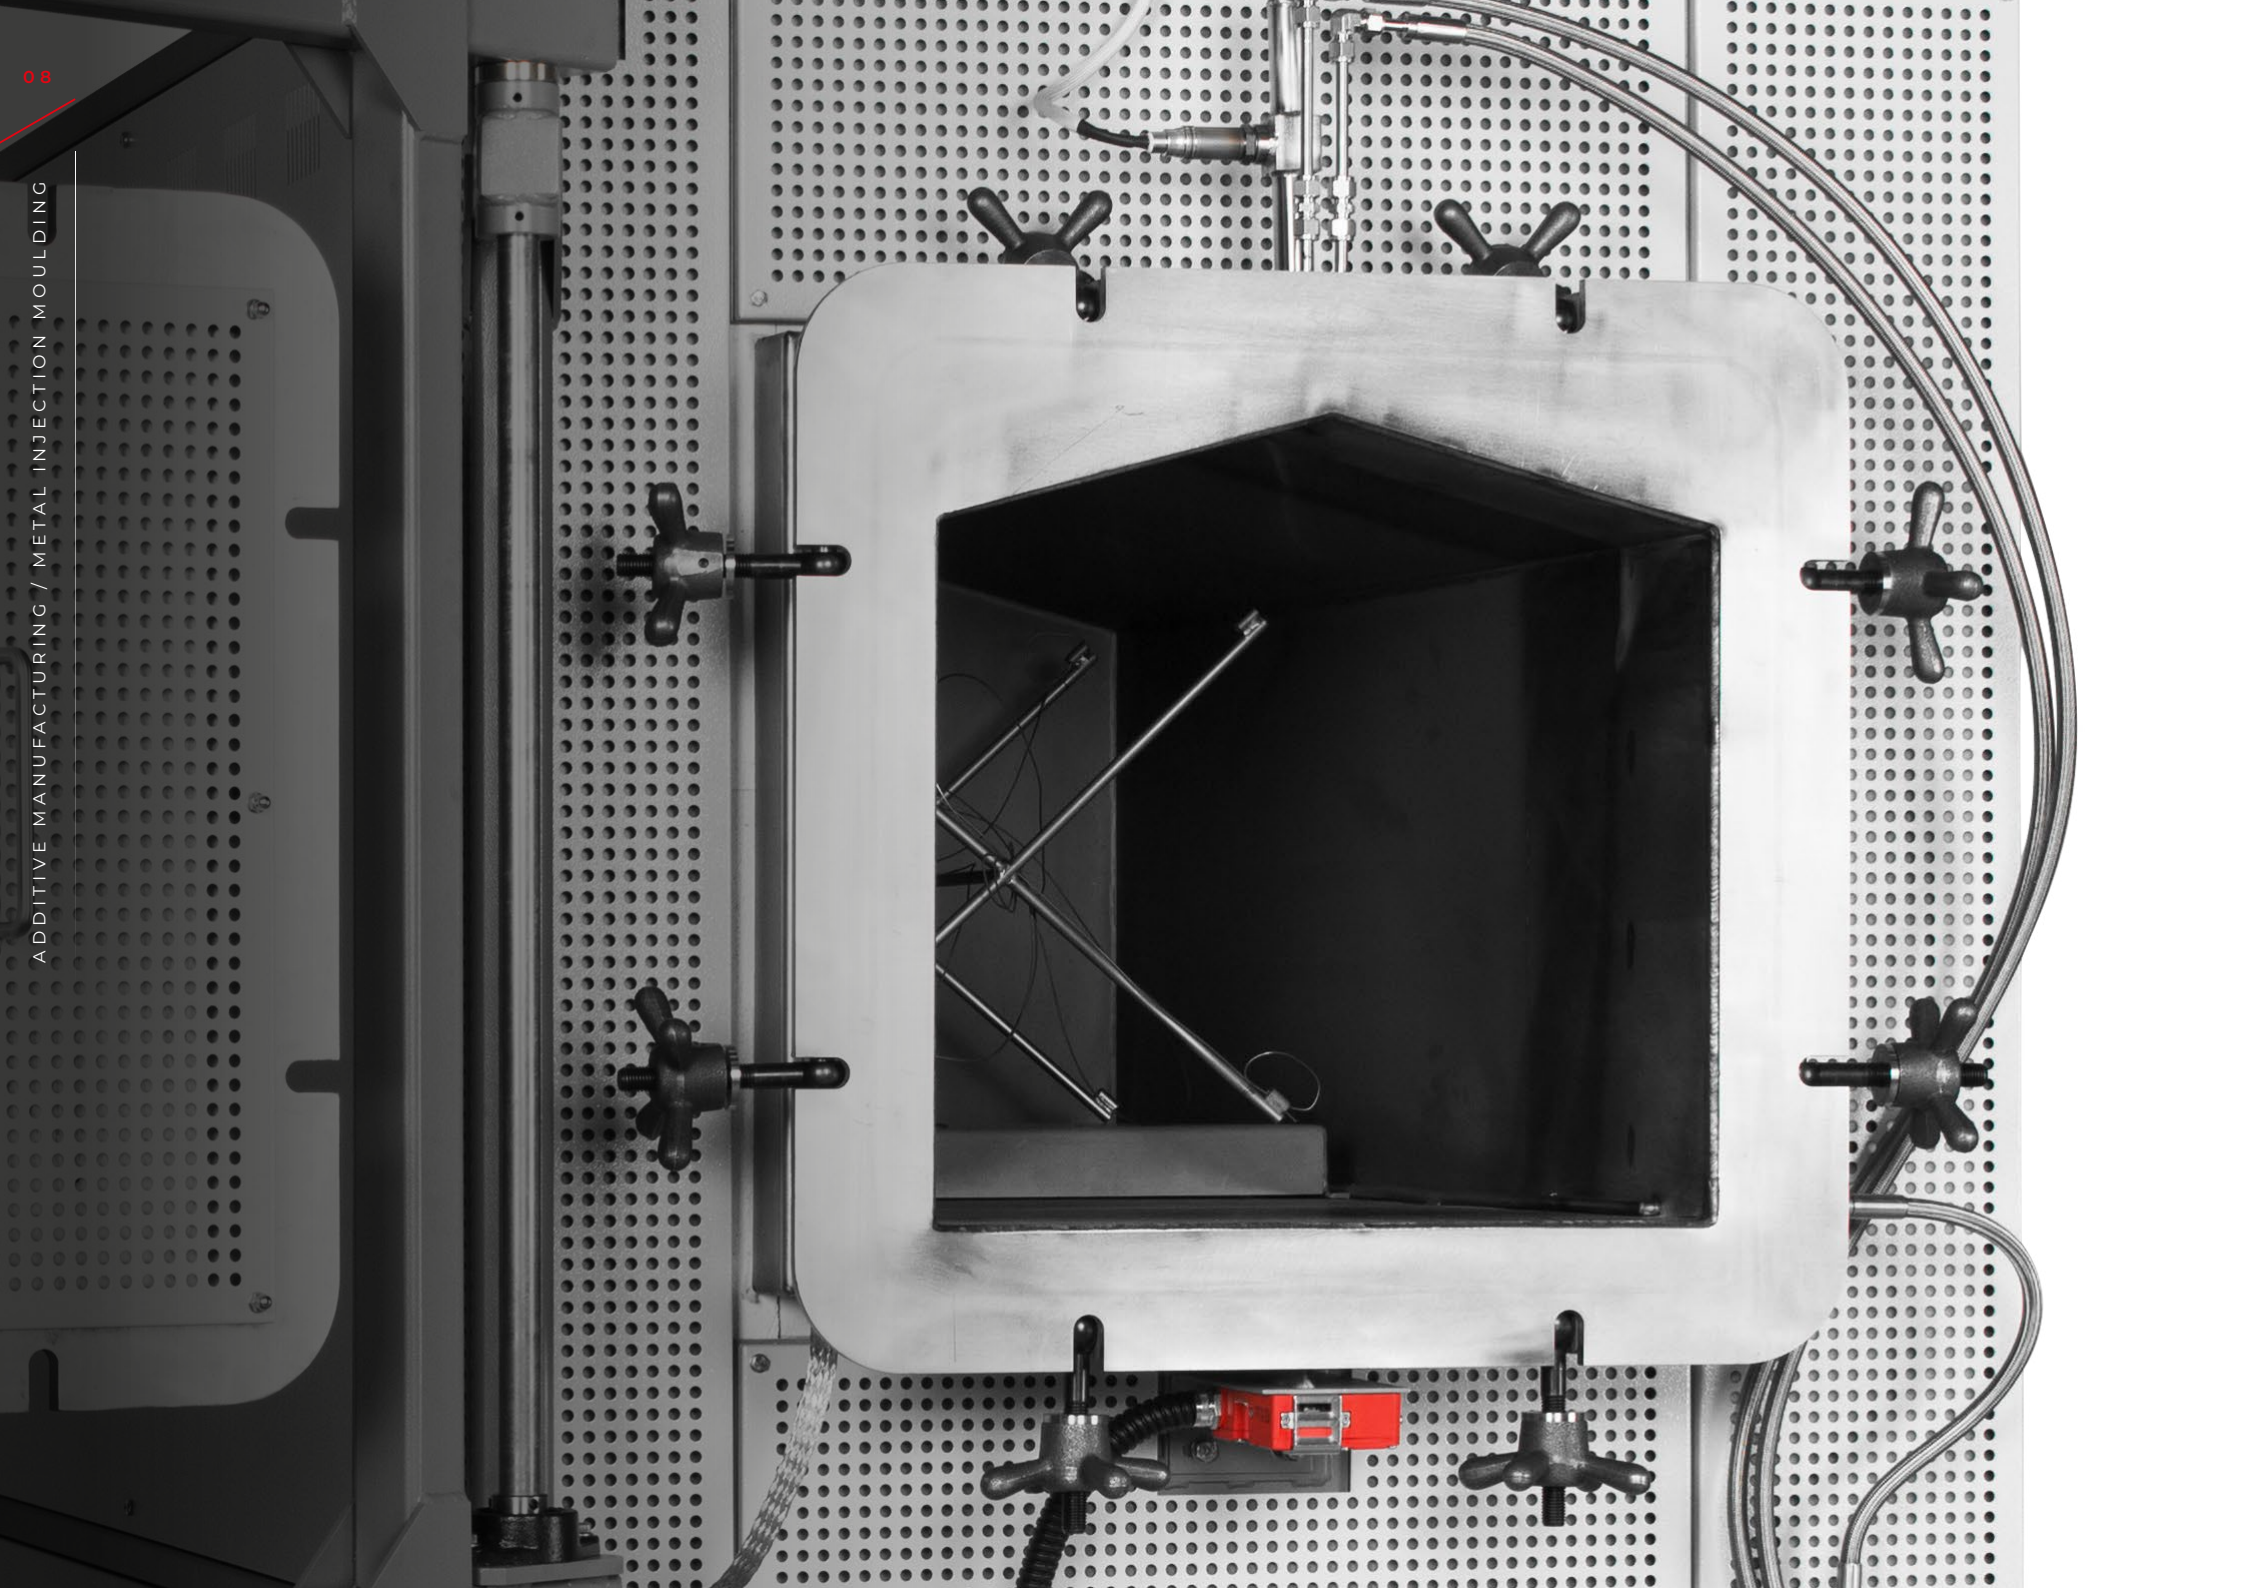

FURNACES & OVENS

FOR DIRECT ADDITIVE METHODS

In direct additive processes high thermal stress is often generated by high heat input during the printing process. CARBOLITE provides customers with two suitable furnaces to achieve the best possible component properties.

GPCMA – MODIFIED ATMOSPHERE FURNACE

The GPCMA modified atmosphere chamber furnaces are equipped with a metallic retort to provide a heated volume with a controlled atmosphere. They are floor-standing models with a smooth action hinged door arrangement.

Available with a range of maximum temperature from 1000 °C to 1150 °C depending on the selected retort material. Retort working volumes range from 37 to 245 litres.

Oxygen levels can be reduced to 30 ppm depending on the application. Perfect for stress relieving additive manufactured components particularly those produced via DMLS. This range of furnaces can be optionally specified for compliance to AMS2750F Nadcap class 1 for aerospace applications.

APPLICATION EXAMPLES

- | General heat treatment, stress relieving 3D printed additive manufactured parts

V-L – TOP HAT FURNACE

The V-L furnace is suitable for generating the lowest achievable operation pressures. Due to this vacuum capability, the highest purity gas atmosphere can be achieved.

APPLICATION EXAMPLES

- | Annealing, brazing, degassing, quenching, rapid prototyping, sintering, soldering, synthesis, tempering, stress relieving 3D printed additive manufactured parts



GPCMA

- | Stress relieving
- | Argon, nitrogen, forming gas
- | Large usable volume for many parts, big parts
- | Precise temperature uniformity
- | Oxygen levels down to 30 ppm





V-L

- | Stress relieving
- | Argon, nitrogen, forming gas, high vacuum
- | Oxygen levels <<30 ppm
- | Precise temperature uniformity



30

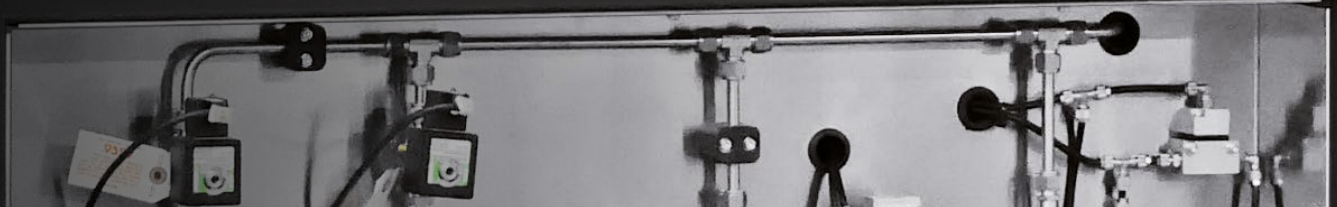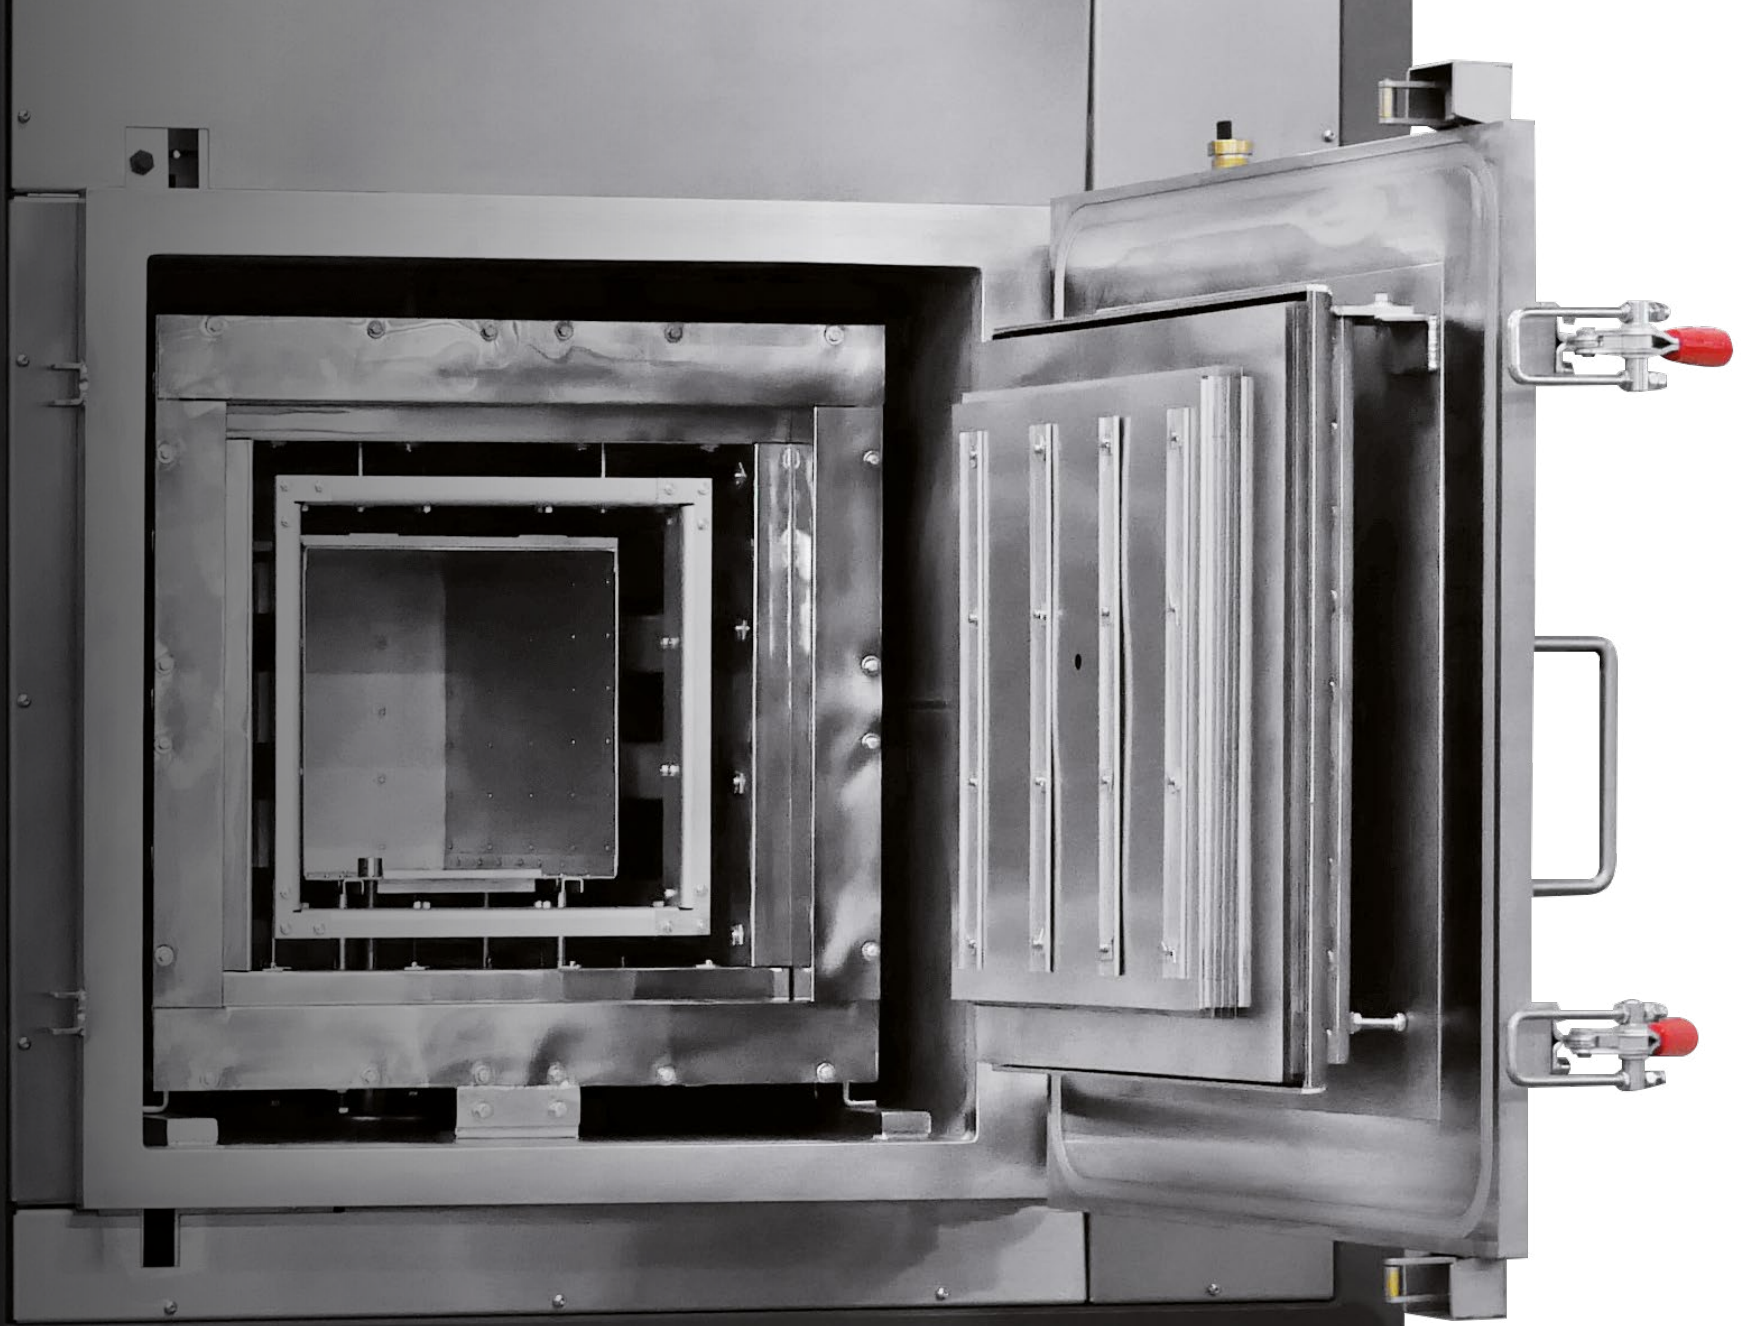

DEBINDING & SINTERING FURNACES

FOR INDIRECT ADDITIVE METHODS

GLO 8 LITRE – ENTRY-LEVEL FURNACE

With the GLO 8/13 Carbolite provides a small versatile furnace for Additive Manufacturing. The furnace features rotationally symmetrical heating elements that surround a cylindrical retort, ensuring uniform heating along the entire length.

The furnace can be operated either with nitrogen, argon or forming gas (N_2/H_2 95/5 % or Ar/H_2 98/2 %).

APPLICATION EXAMPLES

| Thermal debinding, sintering, pyrolysis, synthesis, annealing, tempering

GLO & HTK MULTI-STEP SOLUTION – ADVANCED FURNACES

The GLO furnace is designed for thermal debinding and pre-sintering processes up to 1100 °C, with models available up to 1300 liters. It supports inert, reactive, or vacuum atmospheres, and its hot wall design ensures even heating to prevent condensation. Binders and volatiles are safely removed via an afterburner system.

The HTK high temperature furnace range features molybdenum or tungsten heating elements, operating up to 2200 °C. These furnaces can run with hydrogen, nitrogen, argon, or in vacuum, with freely adjustable gas concentrations to suit specific processing needs.

APPLICATION EXAMPLES

GLO

| Thermal debinding, sintering, pyrolysis, synthesis, annealing, tempering

HTK

| Debinding, sintering, annealing, tempering, brazing, soldering



GLO 8/13

- | Up to 1300 °C
- | Ø 180 x 500 mm
- | Gas tight
- | Robust and reliable



GLO 120/11-2G Auto

- | Up to 1100 °C
- | 10 to 1300 litres volume
- | Hot wall furnace
- | Partial pressure debinding

HTK 25 Auto

- | Up to 2200 °C
- | 8 to 120 litres volume
- | Cold wall furnace
- | Partial pressure sintering

HISTORY FACTS

In 1909 Bakelite became the first injectable man-made polymer, changing the face of manufacturing forever. Since then, plastic injection moulding has been further developed and is nowadays one of the most common methods used to produce polymeric parts.

This breakthrough in manufacturing sparked the idea of applying the injection moulding process to different materials. The first studies on ceramic injection moulding (CIM) originated in the 1920s, making ceramic material available for the injection process.

In 1970 metal injection moulding (MIM) was invented by Dr. Raymond and E. Wiech Jr. Subsequently, it has become a standard industrial process. Early in these developments, the required furnaces were not dedicated to this process had to be modified to meet the requirements for MIM.

The direct manufacturing method Laser Powder Bed Fusion (LPBF) was first demonstrated in 1995 at the Fraunhofer institute in Aachen by Dr. Schwarze and Dr. Fockele.

Since the beginning of the 21st century, the Additive Manufacturing (AM) or 3D printing methods further expanded the field of direct and indirect manufacturing methods. Regardless of the process, heat treatment is a vital manufacturing step, often overlooked.

With over 80 years of furnace engineering experience, Carbolite have developed furnaces specifically for debinding and sintering processes. Our latest generation of MIM furnaces is now available to customers all over the world.


INTRODUCTION TO METAL INJECTION MOULDING (MIM)

PROCESS OVERVIEW

MIM (Metal Injection Moulding) is a near net-shaping process technology for the production of complex shaped devices with high throughput. For MIM technology a polymer is mixed with a metallic powder. The so called "feedstock" is formed, that can be injected into moulding cavities afterwards to form the "green part". A typical injection moulding machine is the ALLROUNDER® from Arburg. With this technology it is possible to obtain very complex geometries with high reproducibility. After shaping the "green part" the polymeric binder is removed either chemically (with catalytic additives, solvents, water) or by heat treatment dependent on the used feedstock. This procedure is followed by sintering, i.e. densification by heat treatment.


MIM PROCESS STEPS

1. FEEDSTOCK MIXING AND GRANULATING
2. MOULDING
3. FIRST STAGE BINDER REMOVAL
4. SECOND STAGE BINDER REMOVAL AND SINTERING
5. FINISHING

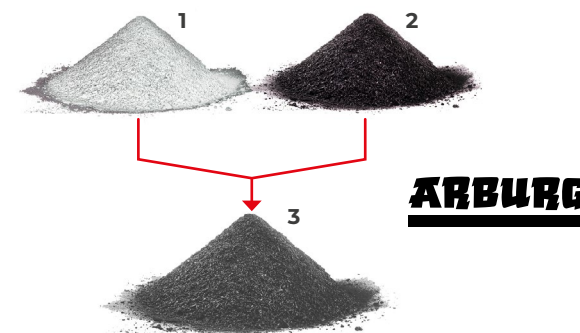


FEEDSTOCK MIX

Binder (1) and metal powder (2) are combined to result in the feedstock (3)

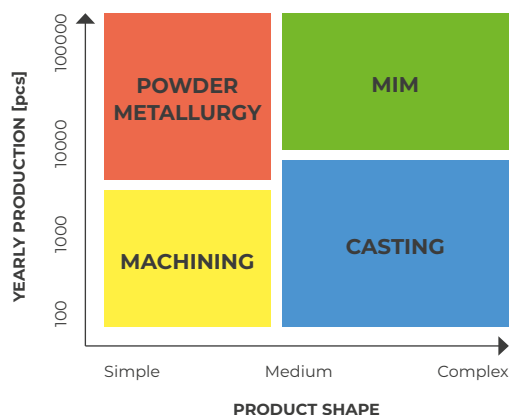

MASS PRODUCTION

Incorporation of existing manufacturing technologies for mass production



PARTS THROUGHOUT HEAT TREATMENT

Green part (1) formed by Metal Injection Moulding, brown part (2) after binder removal and finished part (3) after sintering



CARBOLITE

FURNACES FOR ADDITIVE MANUFACTURING & METAL INJECTION MOULDING



FURNACES ARE OUR PASSION

**HIGH QUALITY
GREAT PERFORMANCE**

FURNACES FOR METAL INJECTION MOULDING

MORE THAN 30 YEARS OF EXPERIENCE



EBOMIM 3

CATALYTIC DEBINDING

The EBO-MIM was specially developed to meet the strict requirements of **catalytic debinding** of MIM parts. This oven is an ideal solution for debinding green parts from **Catamold® - made by BASF** feedstock.

Nitric acid (HNO_3) is vaporized and introduced into the furnace with the carrier gas nitrogen, where a recirculation fan delivers the acid around the green parts. The nitric acid cracks the main binder, creating formaldehyde (CH_2O), which is gaseous and explosive in concentrations between 7 % - 73 %.

The gas flow directs the formaldehyde towards the furnace gas outlet where it is then safely combusted using an active torch afterburner.



GLOMIM 3

REST DEBINDING & PRE-SINTERING

For MIM technologies the **thermal debinding** process should guarantee the binder decomposition, safe removal of volatile substances and protection of metallic powder from oxidation.

All requirements can be fulfilled by our GLO-MIM furnaces. Each furnace is equipped with a gas-tight retort and a continuous gas flow guides the volatiles to the exhaust system. No oxygen gets into the furnace, which means the sample is protected, does not oxidize and no dangerous atmosphere is created.

These furnaces are designed to enable the use of a controlled atmosphere up to 1100°C , allowing the **pre-sintering** process to take place.



HTKMIM 3

REST DEBINDING & FULL SINTERING

Sintering of the brown parts for MIM technologies requires vacuum furnace technology. The ideal solution for this is the HTK-MIM vacuum furnace. It is equipped with all relevant features for debinding and sintering.

HTK-MIM series is suitable for thermal **rest debinding** of the backbone binder of MIM parts (typically 1 % backbone binder).

The final sintering step can be performed at a maximum temperature of 1450°C . In each process step, all required gas atmospheres and vacuum levels are possible.

HEAT TREATMENT SOLUTIONS FOR MIM

INDIVIDUAL, RELIABLE SOLUTIONS



Carbolite offers two main multi-step solutions for the heat treatment of Metal Injection Moulding (MIM) parts:

For the most widely used feedstock systems, i.e. **Catamold® - made by BASF**, the Metal Injection Moulding process requires catalytic debinding, thermal debinding of the backbone binder, and sintering. Carbolite provides customers with two different process options consisting of two or three furnaces.


The first option is a combination of the **EBO-MIM** and **HTK-MIM** furnaces. Catalytic removal of the binder is carried out in the EBO-MIM, whilst both thermal debinding of the backbone binder and sintering can be performed inside the HTK-MIM. The main benefit of this solution is that the entire process can be carried out using only two furnaces.

The second option is a combination of the **EBO-MIM**, **GLO-MIM**, and **HTK-MIM**. Catalytic removal of the main binder is carried out in the EBO-MIM, thermal rest debinding of the backbone binder and pre-sintering in the GLO-MIM, and main sintering in the HTK-MIM furnace.


Whilst this solution incorporates an additional furnace into the process, overall it can prove a more cost-effective solution because the molybdenum / tungsten parts of the HTK-MIM furnace are protected from contamination, thus maintenance costs are reduced.

PROCESS OPTION 1

1. CATALYTIC DEBINDING





EBO-MIM



2. THERMAL DEBINDING & SINTERING




HTK-MIM




PROCESS OPTION 2


1. CATALYTIC DEBINDING




EBO-MIM




2. THERMAL DEBINDING



GLO-MIM



3. SINTERING



HTK-MIM






THE BEST SOLUTION FOR YOUR PRODUCTION

Carbolite offers a whole range of furnaces for the MIM process, starting with small units for R&D, up to industrial scale furnaces. But the most widely used MIM debinding and sintering furnaces are made for a total of **three sinter stacks**. Three stacks (380 x 240 mm) with 20 trays each as sample support are the maximum capacity of the **EBO 120**, **GLO 260** and **HTK 120**. That's why we call them **EBOMIM3**, **GLOMIM3** and **HTKMIM3**.

The working space in all **MIM3** furnaces is almost identical, which makes it convenient to move samples from one furnace to another. This is especially important for the MIM process, since both green and brown parts are still fragile before sintering, and re-sorting between process steps is very undesirable.



Cycle time, hours	8	22	8	12	12
Total hours	30		32		
Maintenance	Slightly higher, due to debinding in the sintering furnace		Low, since the sintering furnace is kept clean.		
Hydrogen partial pressure debinding	Yes		Not in the GLO, only in the HTK		

TWO FURNACES		THREE FURNACES		
EBO	HTK	EBO	GLO	HTK
8	22	8	12	12
30		32		
Slightly higher, due to debinding in the sintering furnace		Low, since the sintering furnace is kept clean.		
Yes		Not in the GLO, only in the HTK		

BENEFITS OF CARBOLITE FURNACES

OUR EXPERTISE

SAFETY FIRST


Since the debinding and sintering process requires hydrogen for many high quality materials, safety is paramount. Carbolite has a full TÜV certified safety concept for the whole furnace series, including hydrogen partial pressure operation over the full temperature range. Throughout the product range we are using Siemens PLC hard- and software, which is a modern industrial standard.



GAS FLOW MANAGEMENT

In order to achieve the best possible conditions to remove the binder of MIM components, the gas flow needs to be **continuous and turbulent** to enable it to reach all samples placed within the furnace. The turbulence assists in the removal of binder from green parts during the process.

Carbolite has worked closely with academic institutions to carry out CFD (Computational Fluid Dynamics) simulations to test and improve gas flow inside furnaces typically used for MIM applications.

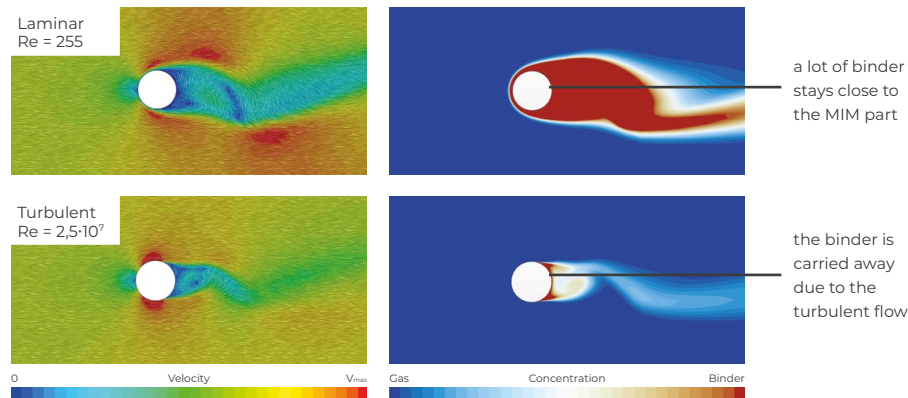

TEMPERATURE UNIFORMITY

Temperature uniformity is the maximum temperature deviation within the usable volume of the furnace chamber. For example, if the furnace is set to 600 °C and it has a stated temperature uniformity of ±5 °C, then temperature within the usable volume cannot drop below 595 °C or exceed 605 °C.

Temperature uniformity is crucial during the sintering of MIM parts, as the aim is to ensure that all parts have an equal amount of shrinkage and density.


Carbolite furnaces are available with multiple heated zones to ensure the temperature inside the chamber is uniform over the entire usable space.

Partial pressure with Ar, N₂ or H₂ is possible in HTK-MIM furnaces. The pressure can be adjusted in the HMI and set between 50 - 1000 mbar. The opening angle of a pneumatic valve is set to ensure the pressure within the furnace vessel is kept at a constant level.

Partial pressure increases the efficiency of debinding and reduces the temperature due to the additional pressure exerted by the vapourised backbone binder.

The design and configuration of the rack enables gas to flow through each layer and around each MIM part. To achieve this, four special gas inlets diffusers direct the flow horizontally through the layers of racking. Each inlet is connected to a separate gas flow, the rate can be individually set to maximise performance depending on the individual requirements.

A special gas outlet plate is fitted to ensure that the gas is distributed uniformly throughout the whole retort of the furnace rather than solely through the centre.

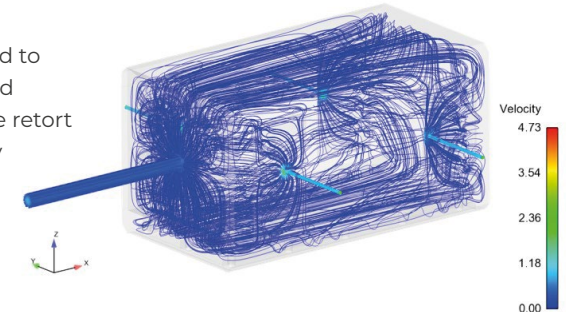


LOW ENERGY CONSUMPTION

Carbolite MIM furnaces are very energy-efficient. Due to our design of the heating cassette energy consumption is drastically reduced, which is an important fact, mainly for production units, and results in reduced costs per MIM-part.

Using a Carbolite furnace reduces your energy cost as well as the carbon footprint.

For instance a full 22 hours rest-debinding / sintering run with typical load of an HTKMIM3 required a total of 900 kWh. Usual values in the market are more than twice as high.

**UP TO 50 % LESS ENERGY REQUIRED!
COMPARISON WITH EQUIVALENT COMPETITOR PRODUCT**

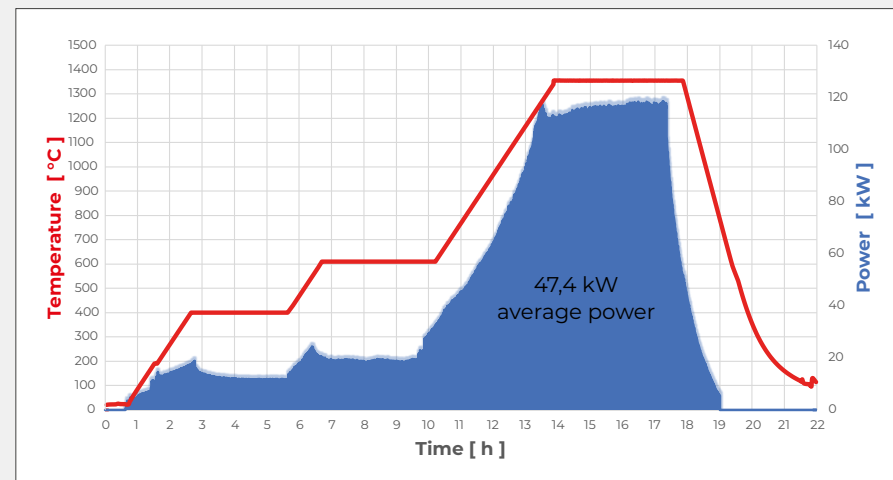


Carbolite Gero GmbH & Co. KG

Hesselbachstr. 15
75242 Neuhausen
Germany

Telephone: +49 7234 9522 0
info@carbolite.de

www.carbolite.com

 www.youtube.com/c/CarboliteGero-TV
 www.linkedin.com/company/carbolite



Carbolite Gero Limited

Parsons Lane, Hope
Hope Valley, S33 6RB
United Kingdom

Telephone: +44 1433 620011
info@carbolite.com

VERDER

CARBOLITE is part of VERDER's scientific division, a group of leading laboratory equipment companies specializing in sample preparation and analysis for quality control and research & development.

VERDER enables organizations worldwide to achieve economic, technological, and environmental progress through advanced scientific applications, making the world healthier, safer, and more sustainable.

